

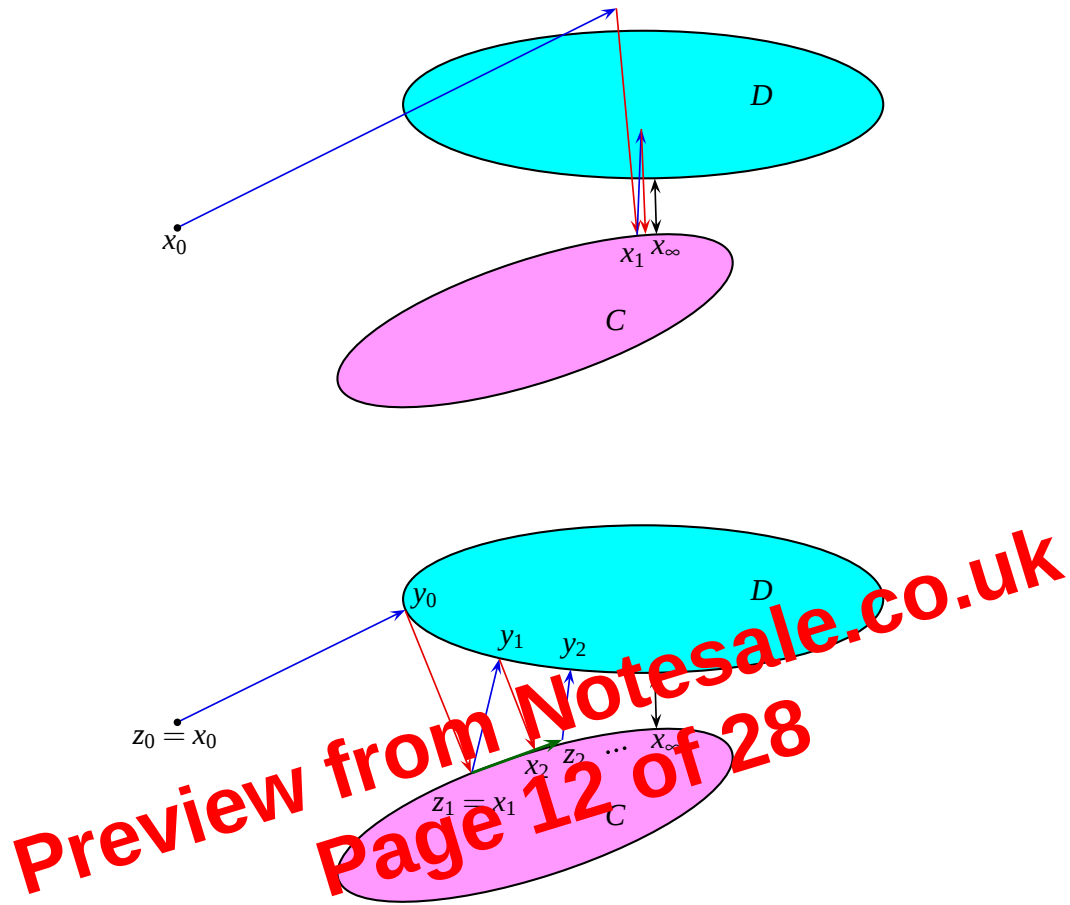


Fig. 10.2 Forward-backward versus Beck-Teboulle : As in Example 10.12, let C and D be two closed convex sets and consider the problem (10.30) of finding a point x_∞ in C at minimum distance from D . Let us set $f_1 = \iota_C$ and $f_2 = d_D^2/2$. Top: The forward-backward algorithm with $\gamma_n \equiv 1.9$ and $\lambda_n \equiv 1$. As seen in Example 10.12, it reduces to the alternating projection method (10.31). Bottom: The Beck-Teboulle algorithm.

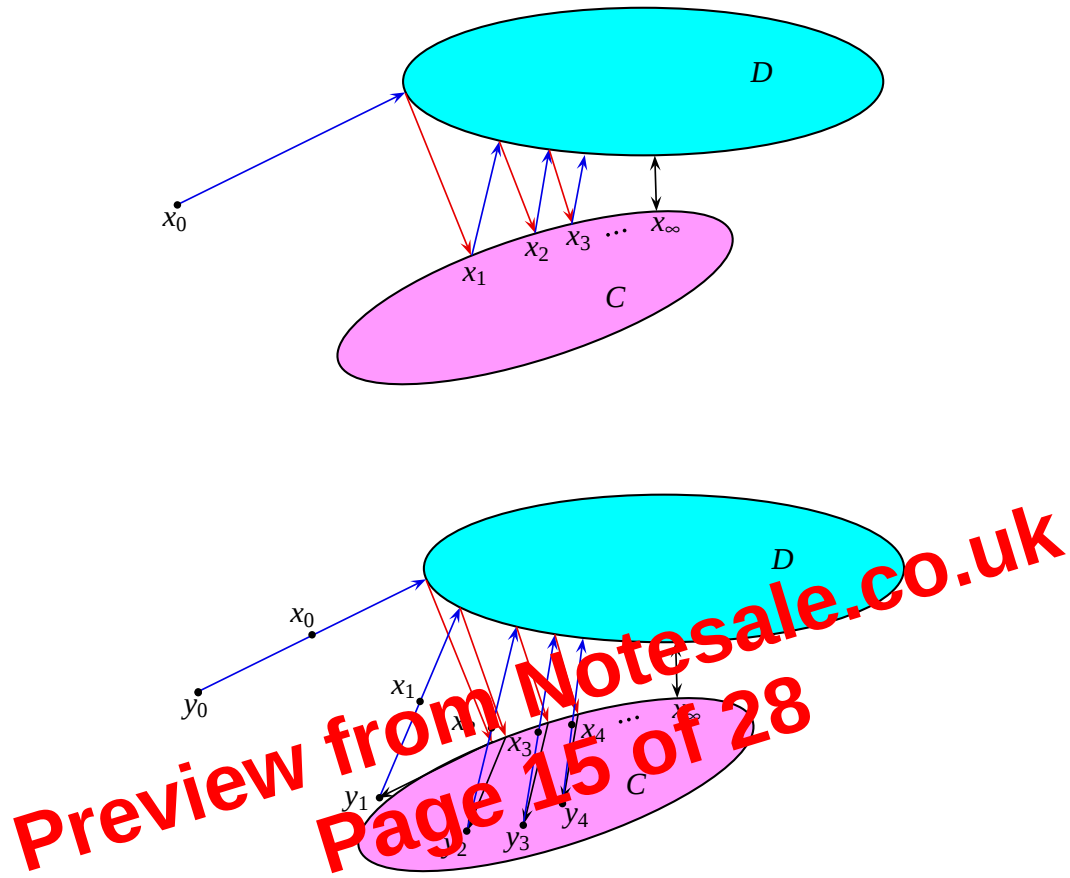


Fig. 10.3 Forward-backward versus Douglas–Rachford: As in Example 10.12, let C and D be two closed convex sets and consider the problem (10.30) of finding a point x_∞ in C at minimum distance from D . Let us set $f_1 = \iota_C$ and $f_2 = d_D^2/2$. Top: The forward–backward algorithm with $\gamma_n \equiv 1$ and $\lambda_n \equiv 1$. As seen in Example 10.12, it assumes the form of the alternating projection method (10.31). Bottom: The Douglas–Rachford algorithm with $\gamma = 1$ and $\lambda_n \equiv 1$. Table 10.1.xii yields $\text{prox}_{f_1} = P_C$ and Table 10.1.vi yields $\text{prox}_{f_2} : x \mapsto (x + P_D x)/2$. Therefore the updating rule in Algorithm 10.15 reduces to $x_n = (y_n + P_D y_n)/2$ and $y_{n+1} = P_C(2x_n - y_n) + y_n - x_n = P_C(P_D y_n) + y_n - x_n$.

(such techniques were introduced in [110, 111] and have been used in the context of convex feasibility problems in [10, 43, 45]). To this end, observe that (10.53) can be rewritten in $\mathcal{H}$ as

$$\underset{\substack{(x_1, \dots, x_m) \in \mathcal{H} \\ x_1 = \dots = x_m}}{\text{minimize}} \quad f_1(x_1) + \dots + f_m(x_m). \quad (10.55)$$

If we denote by $x = (x_1, \dots, x_m)$ a generic element in $\mathcal{H}$, (10.55) is equivalent to

$$\underset{x \in \mathcal{H}}{\text{minimize}} \quad t_D(x) + f(x), \quad (10.56)$$

where

$$\begin{cases} D = \{(x, \dots, x) \in \mathcal{H} \mid x \in \mathbb{R}^N\} \\ f: x \mapsto f_1(x_1) + \dots + f_m(x_m). \end{cases} \quad (10.57)$$

We are thus back to a problem involving two functions in the larger space $\mathcal{H}$. In some cases, this observation makes it possible to obtain convergent methods from the algorithms discussed in the preceding sections. For instance, the following parallel algorithm was derived from the Douglas–Rachford algorithm in [54] (see also [49] for further analysis and connections with Spingarn’s splitting method [120]).

Algorithm 10.27 (Parallel proximal algorithm (PPXA))

Fix $\varepsilon \in]0, 1[$, $\gamma > 0$, $(\omega_i)_{1 \leq i \leq m} \in]0, 1]^m$ such that

$$\sum_{i=1}^m \omega_i = 1, \quad y_{1,0} \in \mathbb{R}^N, \dots, y_{m,0} \in \mathbb{R}^N$$

Set $x_0 = \sum_{i=1}^m \omega_i y_{i,0}$

For $n = 0, 1, \dots$

 For $i = 1, \dots, m$

$$\quad \quad p_{i,n} = \text{prox}_{f_i/\omega_i} y_{i,n}$$

$$\quad \quad p_n = \sum_{i=1}^m \omega_i p_{i,n}$$

$$\quad \quad \varepsilon \leq \lambda_n \leq 2 - \varepsilon$$

 For $i = 1, \dots, m$

$$\quad \quad y_{i,n+1} = y_{i,n} + \lambda_n (2p_n - x_n - p_{i,n})$$

$$\quad \quad x_{n+1} = x_n + \lambda_n (p_n - x_n).$$

Proposition 10.28 [54] Every sequence $(x_n)_{n \in \mathbb{N}}$ generated by Algorithm 10.27 converges to a solution to Problem 10.26.

Example 10.29 (image recovery) In many imaging problems, we record an observation $y \in \mathbb{R}^M$ of an image $\bar{z} \in \mathbb{R}^K$ degraded by a matrix $L \in \mathbb{R}^{M \times K}$ and corrupted by noise. In the spirit of a number of recent investigations (see [37] and the references therein), a tight frame representation of the images under consideration can be used. This representation is defined through a synthesis matrix $F^\top \in \mathbb{R}^{K \times N}$ (with $K \leq N$) such that $F^\top F = \nu I$, for some $\nu \in]0, +\infty[$. Thus, the original image can be written

14. Bauschke, H.H., Combettes, P.L., Reich, S.: The asymptotic behavior of the composition of two resolvents. *Nonlinear Anal.* **60**, 283–301 (2005)
15. Beck, A., Teboulle, M.: Fast gradient-based algorithms for constrained total variation image denoising and deblurring problems. *IEEE Trans. Image Process.* **18**, 2419–2434 (2009)
16. Beck, A., Teboulle, M.: A fast iterative shrinkage-thresholding algorithm for linear inverse problems. *SIAM J. Imaging Sci.* **2**, 183–202 (2009)
17. Bect, J., Blanc-Féraud, L., Aubert, G., Chambolle, A.: A ℓ^1 unified variational framework for image restoration. *Lecture Notes in Comput. Sci.* **3024**, 1–13 (2004)
18. Benvenuto, F., Zanella, R., Zanni, L., Bertero, M.: Nonnegative least-squares image deblurring: improved gradient projection approaches. *Inverse Problems* **26**, 18 (2010). Art. 025004
19. Bertsekas, D.P., Tsitsiklis, J.N.: *Parallel and Distributed Computation: Numerical Methods*. Athena Scientific, Belmont, MA (1997)
20. Bioucas-Dias, J.M., Figueiredo, M.A.T.: A new TwIST: Two-step iterative shrinkage/thresholding algorithms for image restoration. *IEEE Trans. Image Process.* **16**, 2992–3004 (2007)
21. Bouman, C., Sauer, K.: A generalized Gaussian image model for edge-preserving MAP estimation. *IEEE Trans. Image Process.* **2**, 296–310 (1993)
22. Boyle, J.P., Dykstra, R.L.: A method for finding projections onto the intersection of convex sets in Hilbert spaces. *Lecture Notes in Statist.* **37**, 28–47 (1986)
23. Bredies, K.: A forward-backward splitting algorithm for the minimization of non-smooth convex functionals in Banach space. *Inverse Problems* **25**, 20 (2009). Art. 015005
24. Bredies, K., Lorenz, D.A.: Linear convergence of iterative soft-thresholding. *J. Fourier Anal. Appl.* **14**, 813–837 (2008)
25. Brègman, L.M.: The method of successive projection for finding a common point of convex sets. *Soviet Math. Dokl.* **6**, 688–692 (1965)
26. Brézis, H., Lions, P.L.: Produits infinis de résolvantes. *Israel J. Math.* **2**, 129–147 (1978)
27. Briceño-Arias, L.M., Combettes, P.L.: Convex variational formulation with smooth coupling for multicomponent signal decomposition and recovery. *Numer. Math. Theory Methods Appl.* **2**, 485–508 (2009)
28. Cai, J.F., Chan, R.H., Shen, L., Shen, Z.: Convergence analysis of a tight framelet approach for missing data recovery. *Adv. Comput. Math.* **31**, 87–111 (2009)
29. Cai, J.F., Chan, R.H., Shen, L., Shen, Z.: Simultaneous inpainting in image and transformed domain. *Numer. Math.* **112**, 509–523 (2009)
30. Cai, J.F., Chan, R.H., Shen, Z.: A framelet-based image inpainting algorithm. *Appl. Comput. Harm. Anal.* **24**, 111–140 (2009)
31. Censor, Y., Zenios, S.A.: *Parallel Optimization: Theory, Algorithms and Applications*. Oxford University Press, New York (1997)
32. Chaâri, L., Pesquet, J.C., Ciuciu, P., Benazza-Benyahia, A.: An iterative method for parallel MRI SENSE-based reconstruction in the wavelet domain. *Med. Image Anal.* **15**, 185–201 (2011)
33. Chambolle, A.: An algorithm for total variation minimization and applications. *J. Math. Imaging Vision* **20**, 89–97 (2004)
34. Chambolle, A.: Total variation minimization and a class of binary MRF model. *Lecture Notes in Comput. Sci.* **3757**, 136–152 (2005)
35. Chambolle, A., DeVore, R.A., Lee, N.Y., Lucier, B.J.: Nonlinear wavelet image processing: Variational problems, compression, and noise removal through wavelet shrinkage. *IEEE Trans. Image Process.* **7**, 319–335 (1998)
36. Chan, R.H., Setzer, S., Steidl, G.: Inpainting by flexible Haar-wavelet shrinkage. *SIAM J. Imaging Sci.* **1**, 273–293 (2008)
37. Chaux, C., Combettes, P.L., Pesquet, J.C., Wajs, V.R.: A variational formulation for frame-based inverse problems. *Inverse Problems* **23**, 1495–1518 (2007)
38. Chaux, C., Pesquet, J.C., Pustelnik, N.: Nested iterative algorithms for convex constrained image recovery problems. *SIAM J. Imaging Sci.* **2**, 730–762 (2009)
39. Chen, G., Teboulle, M.: A proximal-based decomposition method for convex minimization problems. *Math. Programming* **64**, 81–101 (1994)