

- studying the existing or obsolete system and software,
- conducting interviews of users and developers,
- referring to the database or
- collecting answers from the questionnaires.

Feasibility Study

After requirement gathering, the team comes up with a rough plan of software process. At this step the team analyzes if a software can be designed to fulfill all requirements of the user, and if there is any possibility of software being no more useful. It is also analyzed if the project is financially, practically, and technologically feasible for the organization to take up. There are many algorithms available, which help the developers to conclude the feasibility of a software project.

System Analysis

At this step the developers decide a roadmap of their plan and try to bring up the best software model suitable for the project. System analysis includes understanding of software product limitations, learning system related problems or changes to be done in existing systems beforehand, identifying and addressing the impact of project on organization and personnel etc. The project team analyzes the scope of the project and plans the schedule and resources accordingly.

Software Design

Next step is to bring down whole knowledge of requirements and analysis on the desk and design the software product. The inputs from users and information gathered in requirement gathering phase are the inputs of this step. The output of this step comes in the form of two designs; logical design, and physical design. Engineers produce meta-data and data dictionaries, logical diagrams, data-flow diagrams, and in some cases pseudo codes.

Coding

This step is also known as programming phase. The implementation of software design starts in terms of writing program code in the suitable programming language and developing error-free executable programs efficiently.

Testing

An estimate says that 50% of whole software development process should be tested. Errors may ruin the software from critical level to its own removal. Software testing is done while coding by the developers and thorough testing is conducted by testing experts at various levels of code such as module testing,





- **Entities** - Entities are sources and destinations of information data. Entities are represented by rectangles with their respective names.
- **Process** - Activities and action taken on the data are represented by Circle or Round-edged rectangles.
- **Data Storage** - There are two variants of data storage - it can either be represented as a rectangle with absence of both smaller sides or as an open-sided rectangle with only one side missing.
- **Data Flow** - Movement of data is shown by pointed arrows. Data movement is shown from the base of arrow as its source towards head of the arrow as destination.

Levels of DFD

- **Level 0** - Highest abstraction level DFD is known as Level 0 DFD, which depicts the entire information system as one diagram concealing all the underlying details. Level 0 DFDs are also known as context level DFDs.




- **Level 1** - The Level 0 DFD is broken down into more specific, Level 1 DFD. Level 1 DFD depicts basic modules in the system and flow of data among various modules. Level 1 DFD also mentions basic processes and sources of information.




decomposes functions into sub-functions in a hierarchical manner. It depicts the functions performed by system.

HIPO diagrams are good for documentation purpose. Their graphical representation makes it easier for designers and managers to get the pictorial idea of the system structure.

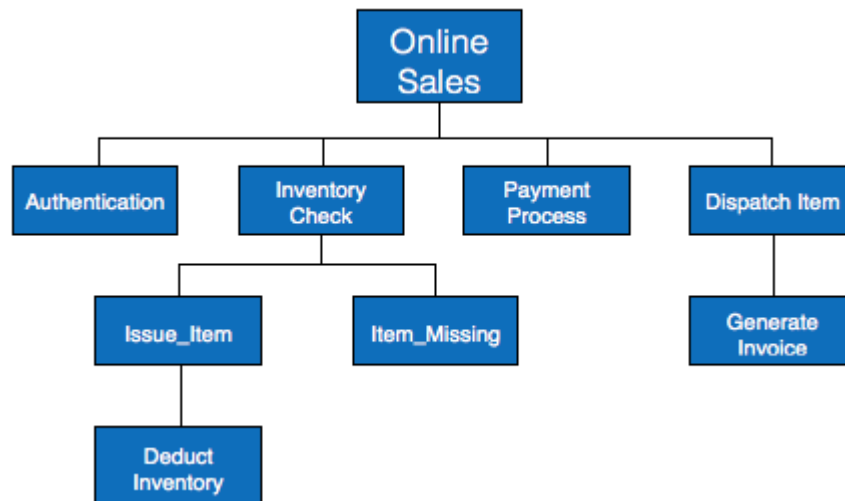

In contrast to Input Process Output (IPO) diagram, which depicts the flow of control and data in a module, HIPO does not provide any information about data flow or control flow.

Preview from Notesale.co.uk
Page 54 of 107

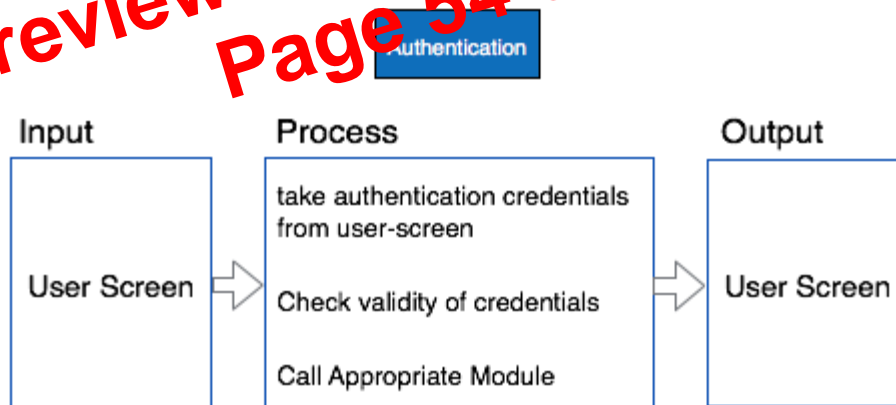

Example

Both parts of HIPO diagram, Hierarchical presentation, and IPO Chart are used for structure designing of software program as well as documentation of the same.



Structured English

Most programmers are unaware of the large picture of software so they only rely on what their managers tell them to do. It is the responsibility of higher software management to provide accurate information to the programmers to develop accurate yet fast code.

Different methods, which use graphs or diagrams, at times might be interpreted in a different way by different people.

Hence, analysts and designers of the software come up with tools such as Structured English. It is nothing but the description of what is required to code and how to code it. Structured English helps the programmer to write error-free code. Here, both Structured English and Pseudo-Code tries to mitigate that understanding gap.

Structured English uses plain English words in structured programming paradigm. It is not the ultimate code but a kind of description what is required to code and how to code it. The following are some tokens of structured programming:

```
IF-THEN-ELSE,
DO-WHILE-UNTIL
```

Analyst uses the same variable and data name, which are stored in Data Dictionary, making it much simpler to write and understand the code.

Example

We take the same example of Customer Authentication in the online shopping environment. This procedure to authenticate customer can be written in Structured English as:

```
Enter Customer_Name
SEEK Customer_Name in Customer_Name_DB file
IF Customer_Name found THEN
    Call procedure USER_PASSWORD_AUTHENTICATE()
ELSE
    PRINT error message
    Call procedure NEW_CUSTOMER_REQUEST()
ENDIF
```



- **Classes** - A class is a generalized description of an object. An object is an instance of a class. Class defines all the attributes, which an object can have and methods, which defines the functionality of the object.

In the solution design, attributes are stored as variables and functionalities are defined by means of methods or procedures.

- **Encapsulation** - In OOD, the attributes (data variables) and methods (operation on the data) are bundled together is called encapsulation. Encapsulation not only bundles important information of an object together, but also restricts access of the data and methods from the outside world. This is called information hiding.
- **Inheritance** - OOD allows similar classes to stack up in hierarchical manner where the lower or sub-classes can import, implement and re-use allowed variables and methods from their immediate super classes. This property of OOD is known as inheritance. This makes it easier to define specific class and to create generalized classes from specific ones.
- **Polymorphism** - OOD languages provide a mechanism where methods performing similar tasks but vary in arguments, can be assigned same name. This is called polymorphism, which allows a single interface performing tasks for different types. Depending upon how the function is invoked, respective portion of the code gets executed.

Design Process

Software design process can be perceived as series of well-defined steps. Though it varies according to design approach (function oriented or object oriented, yet It may have the following steps involved:

- A solution design is created from requirement or previous used system and/or system sequence diagram.
- Objects are identified and grouped into classes on behalf of similarity in attribute characteristics.
- Class hierarchy and relation among them is defined.
- Application framework is defined.



Software Design Approaches

Here are two generic approaches for software designing:

Top Down Design

We know that a system is composed of more than one sub-systems and it contains a number of components. Further, these sub-systems and components may have their own set of sub-systems and components, and creates hierarchical structure in the system.

Top-down design takes the whole software system as one entity and then decomposes it to achieve more than one sub-system or component based on some characteristics. Each sub-system or component is then treated as a system and decomposed further. This process keeps on running until the lowest level of system in the top-down hierarchy is achieved.

Top-down design starts with a generalized model of system and keeps on defining the more specific part of it. When all the components are composed the whole system comes into existence.

Top-down design is more suitable when the software solution needs to be designed from scratch and specific details are unknown.

Bottom-up Design

The bottom up design mode starts with most specific and basic components. It proceeds with composing higher level of components by using basic or lower level components. It keeps creating higher level components until the desired system is not evolved as one single component. With each higher level, the amount of abstraction is increased.

Bottom-up strategy is more suitable when a system needs to be created from some existing system, where the basic primitives can be used in the newer system.

Both, top-down and bottom-up approaches are not practical individually. Instead, a good combination of both is used.



A model used for GUI design and development should fulfill these GUI specific steps.



- **GUI Requirement Gathering** - The designers may like to have list of all functional and non-functional requirements of GUI. This can be taken from user and their existing software solution.
- **User Analysis** - The designer studies who is going to use the software GUI. The target audience matters as the design details change according to the knowledge and competency level of the user. If user is technical savvy, advanced and complex GUI can be incorporated. For a novice user, more information is included on how-to of software.
- **Task Analysis** - Designers have to analyze what task is to be done by the software solution. Here in GUI, it does not matter how it will be done. Tasks can be represented in hierarchical manner taking one major task and dividing it further into smaller sub-tasks. Tasks provide goals for GUI presentation. Flow of information among sub-tasks determines the flow of GUI contents in the software.
- **GUI Design and implementation** - Designers after having information about requirements, tasks and user environment, design the GUI and implements into code and embed the GUI with working or dummy software in the background. It is then self-tested by the developers.



Software Testing Overview

Software Testing is evaluation of the software against requirements gathered from users and system specifications. Testing is conducted at the phase level in software development life cycle or at module level in program code. Software testing comprises of Validation and Verification.

Software Validation

Validation is process of examining whether or not the software satisfies the user requirements. It is carried out at the end of the SDLC. If the software matches requirements for which it was made, it is validated.

- Validation ensures the product under development is as per the user requirements.
- Validation answers the question - "Are we developing the product which attempts all that user needs from this software?"
- Validation emphasizes on user requirements.


Software Verification

Verification is the process of confirming if the software is meeting the business requirements, and is developed adhering to the proper specifications and methodologies.

- Verification ensures the product being developed is according to design specifications.
- Verification answers the question- "Are we developing this product by firmly following all design specifications?"
- Verifications concentrates on the design and system specifications.

Target of the test are -

- **Errors** - These are actual coding mistakes made by developers. In addition, there is a difference in output of software and desired output, is considered as an error.

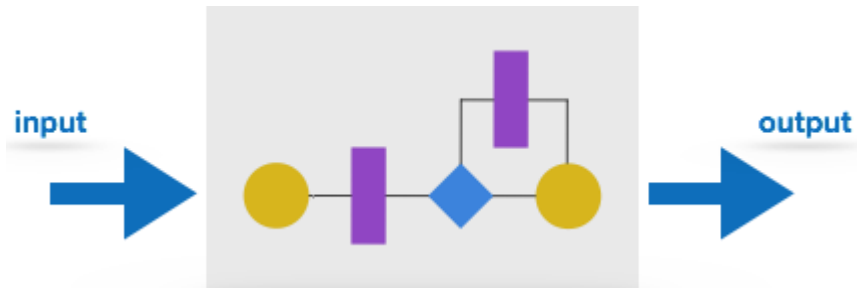

In this testing method, the design and structure of the code are known to the tester. Programmers of the code conduct this test on the code.

The below are some White-box testing techniques:

- **Control-flow testing** - The purpose of the control-flow testing to set up test cases which covers all statements and branch conditions. The branch conditions are tested for both being true and false, so that all statements can be covered.
- **Data-flow testing** - This testing technique emphasis to cover all the data variables included in the program. It tests where the variables were declared and defined and where they were used or changed.

Testing Levels

Testing itself may be defined at various levels of SDLC. The testing process runs parallel to software development. Before jumping on the next stage, a stage is tested, validated and verified.

Testing separately is done just to make sure that there are no hidden bugs or issues left in the software. Software is tested on various levels -

Unit Testing

While coding, the programmer performs some tests on that unit of program to know if it is error free. Testing is performed under white-box testing approach. Unit testing helps developers decide that individual units of the program are working as per requirement and are error free.

Integration Testing

Even if the units of software are working fine individually, there is a need to find out if the units if integrated together would also work without errors. For example, argument passing and data updation etc.



Testing vs. Quality Control & Assurance and Audit

We need to understand that software testing is different from software quality assurance, software quality control and software auditing.

- **Software quality assurance** - These are software development process monitoring means, by which it is assured that all the measures are taken as per the standards of organization. This monitoring is done to make sure that proper software development methods were followed.
- **Software quality control** - This is a system to maintain the quality of software product. It may include functional and non-functional aspects of software product, which enhance the goodwill of the organization. This system makes sure that the customer is receiving quality product for their requirement and the product certified as 'fit for use'.
- **Software audit** - This is a review of procedure used by the organization to develop the software. A team of auditors, independent of development team examines the software process, procedure, requirements and other aspects of SDLC. The purpose of software audit is to check that software and its development process, both conform standards, rules and regulations.

Preview from Notesale.co.uk
Page 94 of 107



Software Maintenance Overview

12

Software maintenance is widely accepted part of SDLC now a days. It stands for all the modifications and updations done after the delivery of software product. There are number of reasons, why modifications are required, some of them are briefly mentioned below:

- **Market Conditions** - Policies, which changes over the time, such as taxation and newly introduced constraints like, how to maintain bookkeeping, may trigger need for modification.
- **Client Requirements** - Over the time, customer may ask for new features or functions in the software.
- **Host Modifications** - If any of the hardware and/or platform (such as operating system) of the target host changes, software changes are needed to keep adaptability.
- **Organization Changes** - If there is any business level change at client end, such as reduction of organization strength, acquiring another company, organization restructuring into new business, need to modify in the original software may arise.

Types of maintenance


In a software lifetime, type of maintenance may vary based on its nature. It may be just a routine maintenance tasks as some bug discovered by some user or it may be a large event in itself based on maintenance size or nature. Following are some types of maintenance based on their characteristics:

- **Corrective Maintenance** - This includes modifications and updations done in order to correct or fix problems, which are either discovered by user or concluded by user error reports.
- **Adaptive Maintenance** - This includes modifications and updations applied to keep the software product up-to date and tuned to the ever changing world of technology and business environment.

- **Perfective Maintenance** - This includes modifications and updates done in order to keep the software usable over long period of time. It includes new features, new user requirements for refining the software and improve its reliability and performance.
- **Preventive Maintenance** - This includes modifications and updations to prevent future problems of the software. It aims to attend problems, which are not significant at this moment but may cause serious issues in future.

Cost of Maintenance

Reports suggest that the cost of maintenance is high. A study on estimating software maintenance found that the cost of maintenance is as high as 67% of the cost of entire software process cycle.

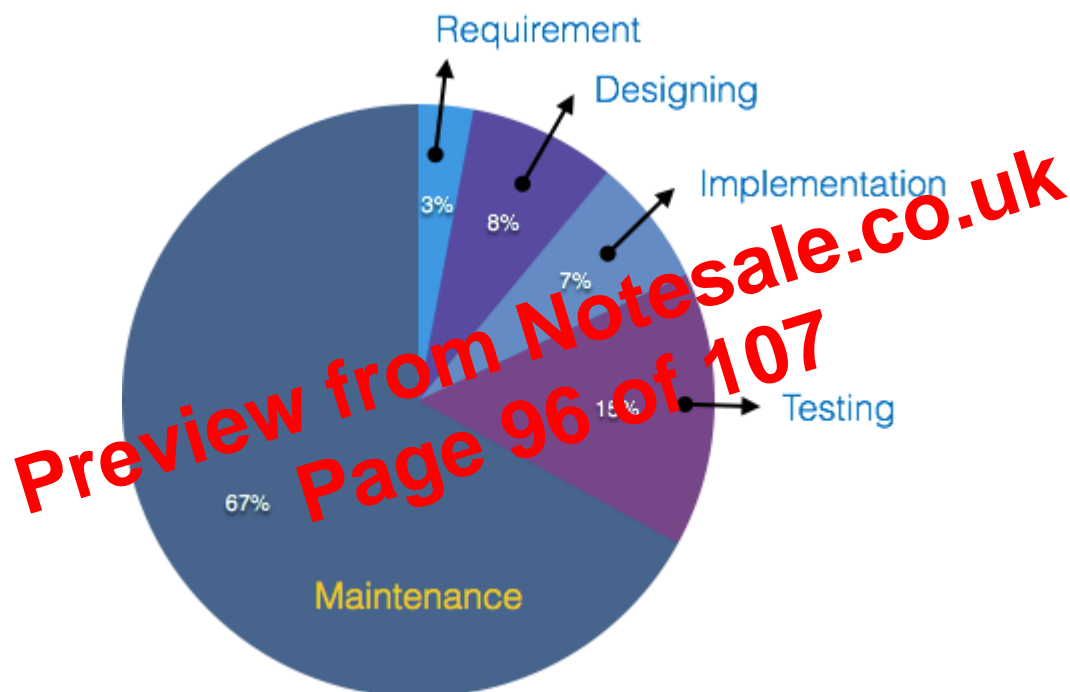

On an average, the cost of software maintenance is more than 50% of all SDLC phases. There are various factors, which trigger maintenance cost go high, such as:

Real-world factors affecting Maintenance Cost

- The standard age of any software is considered up to 10 to 15 years.
- Older softwares, which were meant to work on slow machines with less memory and storage capacity cannot keep themselves challenging against newly coming enhanced softwares on modern hardware.




- As technology advances, it becomes costly to maintain old software.
- Most maintenance engineers are newbie and use trial and error method to rectify problem.
- Often, changes made can easily hurt the original structure of the software, making it hard for any subsequent changes.
- Changes are often left undocumented which may cause more conflicts in future.

Software-end factors affecting Maintenance Cost

- Structure of Software Program
- Programming Language
- Dependence on external environment
- Staff reliability and availability

Maintenance Activities

IEEE provides a framework for sequential maintenance process activities. It can be used in iterative manner and can be extended so that customized items and processes can be included.

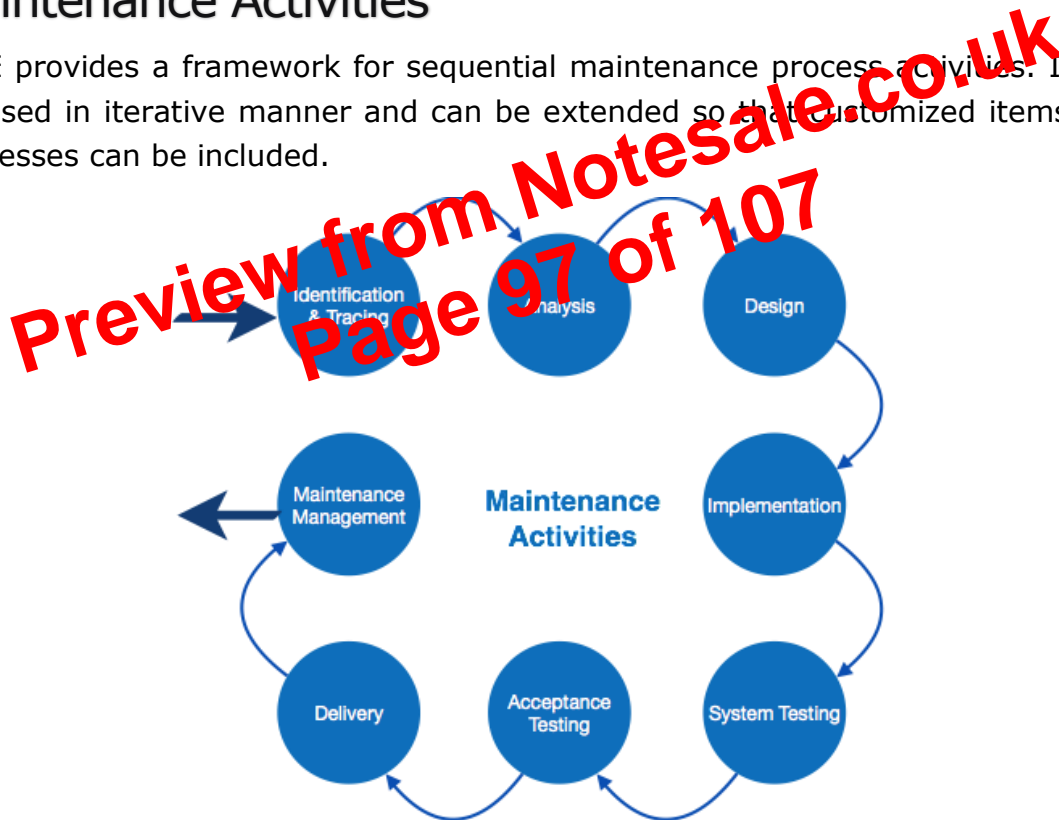

These activities go hand-in-hand with each of the following phase:


- **Identification & Tracing** - It involves activities pertaining to identification of requirement of modification or maintenance. It is generated by user or



Legacy software cannot keep tuning with the latest technology available in the market. As the hardware become obsolete, updating of software becomes a headache. Even if software grows old with time, its functionality does not.

For example, initially Unix was developed in assembly language. When language C came into existence, Unix was re-engineered in C, because working in assembly language was difficult.

Other than this, sometimes programmers notice that few parts of software need more maintenance than others and they also need re-engineering.

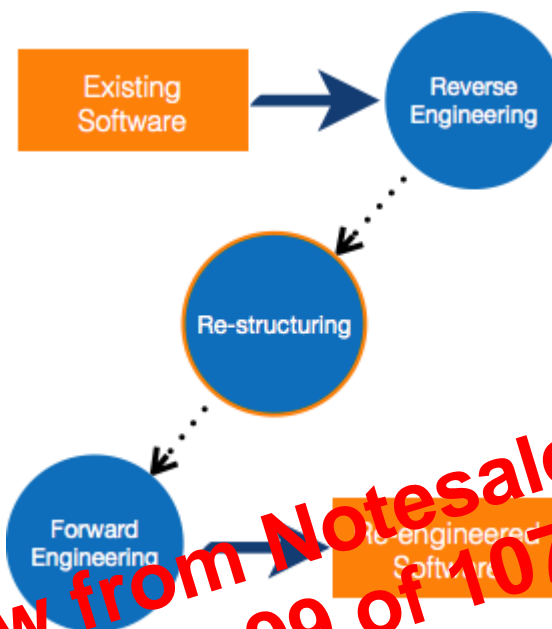

Re-Engineering Process

- **Decide** what to re-engineer. Is it whole software or a part of it?
- **Perform** Reverse Engineering, in order to obtain specifications of existing software.
- **Restructure Program** if required. For example, changing function-oriented programs into object-oriented programs.
- **Re-structure data** as required.
- **Apply Forward engineering** concepts in order to get re-engineered software.


There are few important terms used in Software re-engineering



Reverse Engineering

It is a process to achieve system specification by thoroughly analyzing, understanding the existing system. This process can be seen as reverse SDLC model, i.e. we try to get higher abstraction level by analyzing lower abstraction levels.

An existing system is previously implemented design, about which we know nothing. Designers then do reverse engineering by looking at the code and try to get the design. With design in hand, they try to conclude the specifications. Thus, going in reverse from code to system specification.

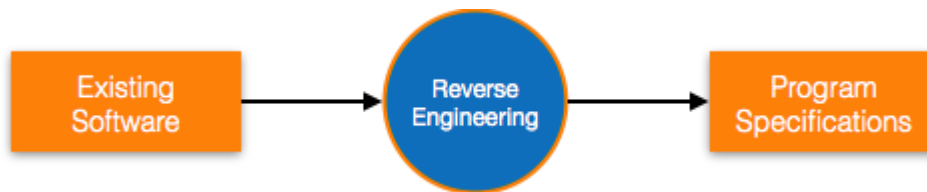

Program Restructuring

It is a process to re-structure and re-construct the existing software. It is all about re-arranging the source code, either in same programming language or from one programming language to a different one. Restructuring can have either source code-restructuring and data-restructuring or both.


Re-structuring does not impact the functionality of the software but enhance reliability and maintainability. Program components, which cause errors very frequently can be changed, or updated with re-structuring.

The dependability of software on obsolete hardware platform can be removed via re-structuring.

Forward Engineering

Forward engineering is a process of obtaining desired software from the specifications in hand which were brought down by means of reverse engineering. It assumes that there was some software engineering already done in the past.

Forward engineering is same as software engineering process with only one difference – it is carried out always after reverse engineering.

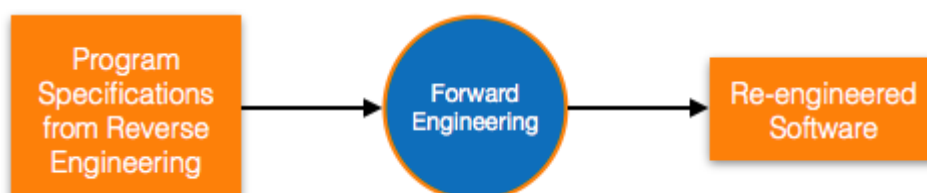

Change Control Tools

These tools are considered as a part of configuration management tools. They deal with changes made to the software after its baseline is fixed or when the software is first released. CASE tools automate change tracking, file management, code management and more. It also helps in enforcing change policy of the organization.

Programming Tools

These tools consist of programming environments like IDE (Integrated Development Environment), in-built modules library and simulation tools. These tools provide comprehensive aid in building software product and include features for simulation and testing. For example, Cscope to search code in C, Eclipse.

Prototyping Tools

Software prototype is simulated version of the intended software product. Prototype provides initial look and feel of the product and simulates few aspect of actual product.

Prototyping CASE tools essentially come with graphical libraries. They can create hardware independent user interfaces and design. These tools help us to build rapid prototypes based on existing information. In addition, they provide simulation of software prototype. For example, Serena prototype composer, Mockup Builder.

Web Development Tools

These tools assist in designing web pages with all allied elements like forms, text, script, graphic and so on. Web tools also provide live preview of what is being developed and how will it look after completion. For example, Fontello, Adobe Edge Inspect, Foundation 3, Brackets.

Quality Assurance Tools

Quality assurance in a software organization is monitoring the engineering process and methods adopted to develop the software product in order to ensure conformance of quality as per organization standards. QA tools consist of configuration and change control tools and software testing tools. For example, SoapTest, AppsWatch, JMeter.

Maintenance Tools

Software maintenance includes modifications in the software product after it is delivered. Automatic logging and error reporting techniques, automatic error



ticket generation and root cause Analysis are few CASE tools, which help software organization in maintenance phase of SDLC. For example, Bugzilla for defect tracking, HP Quality Center.

Preview from Notesale.co.uk
Page 107 of 107

